



Yuasa Technisches Datenblatt

Yuasa YBX9019 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	95Ah
Kaltstartstrom (A) EN1	850A

Abmessungen

Länge	353mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	25.6kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	L5 DIN AGM
Anschlusspol Typ	T1
Batteriehalter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA


Technologie

Flammschutz Technologie	✓	Ca/Ca VRLA
Adskiller		AGMSORTIMENT
VDA Überschlagtest	✓	
Empfohlener Ladestrom		5A
Performance Marking		W5-C2-V3-M3


Anschlusspol Typ

T1

Standard DIN Post

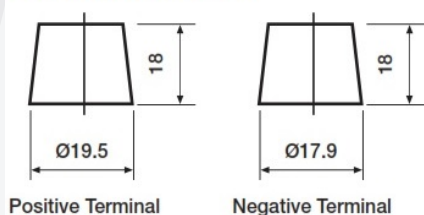

Zellenanordnung

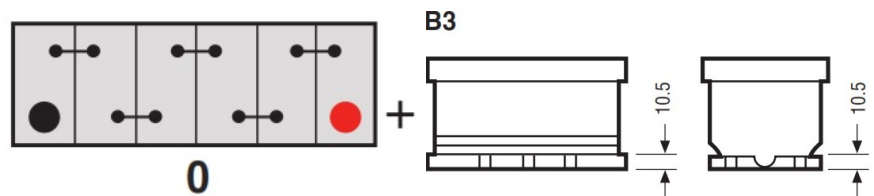

Batteriehalter

Datenblatt erstellt am 17/01/2020 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9019 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	850A

Dimensions

Length	353mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	25.6kg
-----------------------	--------



Container Features

Case Type	L5 DIN AGM
Terminal Type	T1
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	5A
	W5-C2-V3-M3


Terminal Type

T1


Standard DIN Post

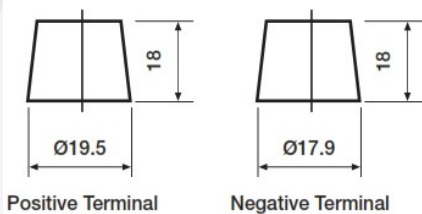

Cell Assembly Layout

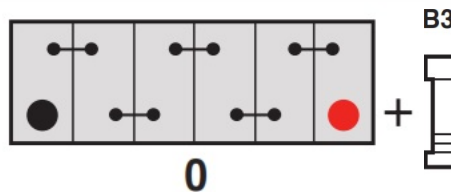

Battery Hold-down

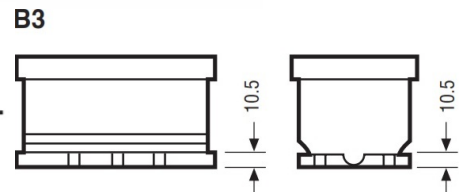

Data Sheet generated on 17/01/2020 - E&OE