



Yuasa Technisches Datenblatt

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	70Ah
Kaltstartstrom (A) EN1	760A

Abmessungen

Länge	278mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	20.5kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	L3 DIN AGM
Batteriehälter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA


Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Adskiller	AGMSORTIMENT
VDA Überschlagtest	✓
Empfohlener Ladestrom	4A
Performance Marking	W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post

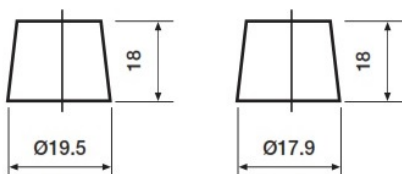

Positive Terminal

Negative Terminal

Zellenanordnung

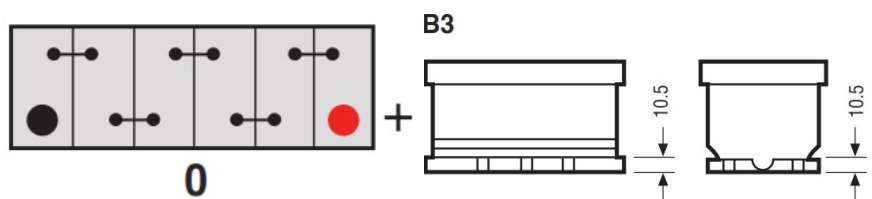

Batteriehälter

Datenblatt erstellt am 17/01/2020 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



Container Features

Case Type	L3 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	4A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

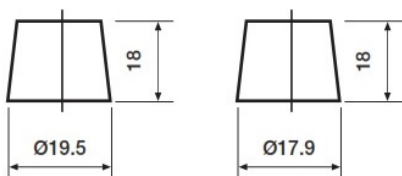


Positive Terminal

Negative Terminal

Cell Assembly Layout

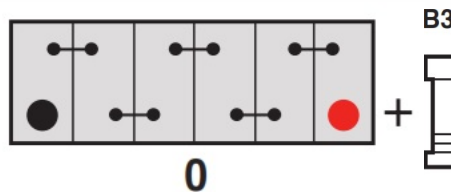

Battery Hold-down

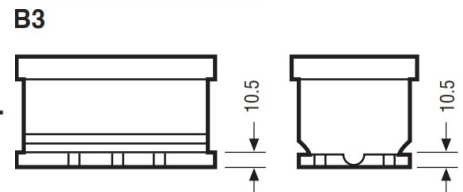

Data Sheet generated on 17/01/2020 - E&OE